



BALL VALVE

BSA ROBINET BOULONNÉ À BOISSEAU ARBRÉ BSA TRUNNION BOLTED BALL VALVE

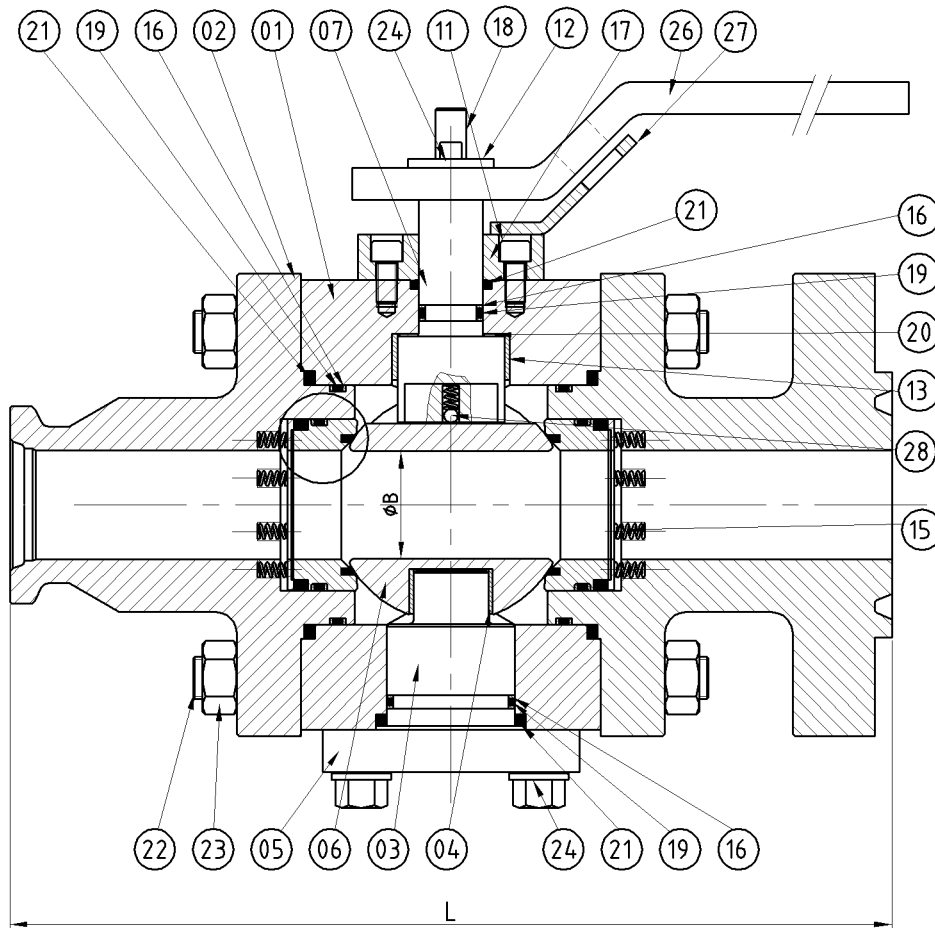

SEAT DETAIL

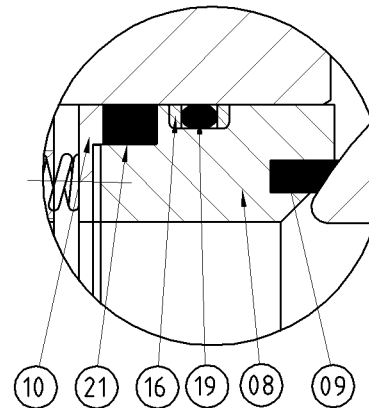

Sizes	from 2" to 6"
Pressure Ratings	ANSI: 150 to 2500 - API 2,000 to 10,000
Material	Carbon Steel / Stainless Steel / Duplex Steel / Aluminum Bronze / High Nickel Alloys / Titanium... Forged or cast construction
Seats	Metal to metal / Soft seat
End Connections	Flanged / Buttweld / Hub ends
Design	Full Bore / Reduced Bore According to: - ANSI B16-34 - API 6D - EEMUA 182 - Customer specifications - API & ISO Fire Safe Certifications - FET ISO 15848 Rate A
Design	Cryogenic - Oxygen Service - High Temperature Special / Low Flow Conditions...

COMPONENT PARTS

28	ANTISTATIQUE / ANTI-STATIC DEVICE
27	PATTE DE VERROUILLAGE / LOCKING DEVICE (OPTION)
26	POIGNEE / HANDLE
25	PLAQUE D'IDENTIFICATION / FIRM PLATE
24	VIS / SCREW
23	ECROU HAUT / HEAVY HEX NUT
22	TIRANT / STUD
21	GARNITURE D'ETANCHEITE / PACKING RING
20	RONDELLE DE FRICTION / FRICTION RING
19	JOINT TORIQUE / O-RING
18	GOUPILLE / PIN
17	CHAPEAU / BONNET
16	BAGUE ANTI-EXTRUSION / ANTI EXTRUSION RING
15	RESSORT / SPRING
13	PALIER / BUSH
12	RONDELLE / WASHER
11	VIS / SCREW
10	PRESSE ETOUPE DE SIEGE / SEAT ACTIVATOR
09	SIEGE / SEAT
08	SUPPORT DE SIEGE / SEAT HOLDER
07	AXE DE COMMANDE / STEM
06	TOURNANT SPHERIQUE / BALL
05	BRIDE D'AXE INFERIEUR / TRUNNION FLANGE
04	PALIER / BUSH
03	AXE INFERIEUR / TRUNNION
02	EMBOUT / END CONNECTOR
01	CORPS / BODY
REP	DESIGNATION